



POWER TO LIFT

HMF 7020K-RCS

The HMF 7020K-RCS will give you speed and strength for heavy lifting along with precise control.



A strong and safe crane with a lot of Power to lift

The 7020K-RCS is one of our most powerful cranes. It is available with a wide range of options, so that it can be modified according to your exact needs.

The crane, furthermore, comes with a number of economic advantages. The low tare weight and reduced space requirements of the crane provide full utilisation of your truck body as well as savings on fuel.

The construction of the crane is moreover designed in a service-friendly manner, which provides for a long lifespan of your crane and in the end low costs of ownership.

Main benefits


- Strength and operational safety
- Great flexibility and smooth operation for demanding tasks
- Suited for a wide range of tasks from heavy lifting to assembly work

PERFORMANCE	7020-K6	7020-K7	7020-K8
Load Moment (tm)	57,9	57,2	56,1
Hydraulic reach (m)	16,1	18,3	20,6
Weight excl. stabilizers (Kg)	5715	5915	6115
Weight of stabilizers, standard (Kg)	925	925	925
Lift-to-weight ratio	8,7	8,4	8
Slewing Angle (°)	∞	∞	∞
Slewing torque (kgm)	7142	7142	7142
Working pressure (bar)	375	375	375
GEOMETRY			
Height above mounting surface (mm)	2480	2480	2480
Width, folded, standard (mm)	2520	2520	2520
Length of crane, no extra valves (mm)	1550	1550	1550


Lifting Capacity




7020-K6-RCS

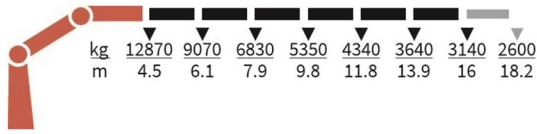


FJ1400-K4



FJ1400-K5



FJ1400-K6




7020-K7-RCS




FJ1400-K3



FJ1400-K4




FJ1400-K5



FJ1400-K6



7020-K8-RCS

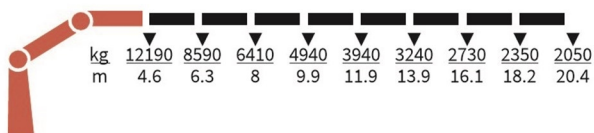

Basics

HMF 7020K-RCS

Electronic speed adaptation system, HDL-d/HD5
Progressive crane control - PCC
Priority flow control - PFC
Dual power plus link arm system
Two slewing gears
Proportional control valve PVG 32
Radio remote control of stabilizer beams and stabilizer legs on crane
Internal hose routing
Environmentally friendly quality coating - EQC
RCL safety system

Options

Control systems
Radio remote control Maxi - RC-MAX
Radio remote control with Power display - POWER-RC
Electrical options
Spotlight
Voltage
Extra valves
2 extra valves
Extra valves in hose reels, internally led
Extra valves in hose reels, externally led
Multi-coupling
Fly-jib
Fly-jib 1400
Personnel basket on Fly-jib - MEWP-FJ
Hydraulic hoist
Hydraulic hoist 3200
2-part snatch block
Hydraulics
Oil cooler, large
1 radio remote controlled available proportional function
Biodegradable oil
Available hydraulic functions, crane mode
Available hydraulic functions, stabilizer mode
Hydraulic functions for separate traverses
Ball valve for tank
Oil tank 320 l mounted on the crane
Oil tank 390 l mounted on the crane
Prepared for front stabilizer
Mechanical options
Manual extension
Protective guard at the rear of the jib
Mounting bolt kit
Fittings for mounting bolt kits
Stability and safety
Electronic vehicle stability - EVS
AutoSwitch - ASW
Cylinder limitation - CYL
Cabin anti-crash
Preparation for alternative stability system

Alarm flash on stabilizer legs
Calibration bypass - CBS
Light tower
Temperature monitoring
Beam and height warning - BEHEW
Stabilizer leg warning
Stabilizer beams and legs
Hydraulic stabilizer beams 8.4 m
Hydraulic swing-up stabilizer legs
Manual swing-up stabilizer legs
Footplate with ball joint
Colours
RAL colors